


SOCKET END RESILIENT SEATED WEDGE GATE VALVE

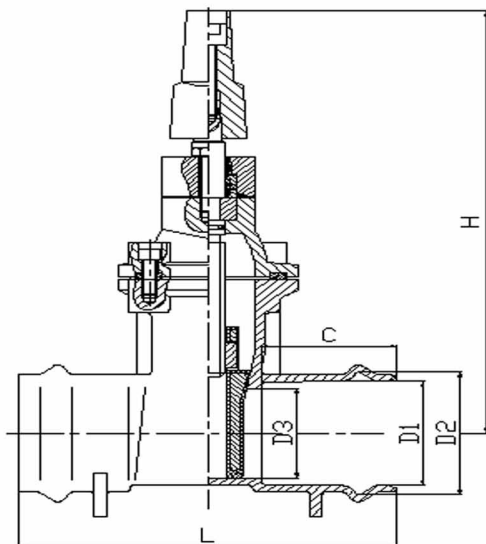

Materials of Parts

Body	Ductile Iron to BS2789 Gr. 500/7
Bonnet	Ductile Iron to BS2789 Gr. 500/7
Disc	Ductile Iron + EPDM
Stem	Stainless Steel to BS970 Gr. SS420
Stem nut	Brass to BS2874
Gasket	EPDM to BS2494
Stem cap	Ductile Iron to BS2789 Gr. 500/7
Bolts & Nuts	SS304 / Carbon Steel with Zinc

Dimension: PN16

Size	D1	D2	D3	C	H	L	Weight kg
DN40/50	50.8	65.3	Ø40	90	230	335	7
DN50/63	63.8	80.2	Ø55	90	250	335	8
DN65/75	75.8	94.1	Ø65	110	275	335	11
DN80/90	90.9	111	Ø80	110	306	335	13
DN100/110	111	133	Ø100	110	337	355	18
DN125/140	141	165	Ø125	120	395	405	32
DN150/160	161	186	Ø150	120	429	405	37
DN200	201	228	Ø178	135	522	450	60
DN250	252	283	Ø228	150	599	500	94
DN300/315	317	352	Ø300	170	689	550	123

Note: The illustrations in this catalogue are subject to modifications without notice.

MINGPIN MPM METALS

No.69 Wangjiang West Road,Hefei,China
sales@mingpinmetals.com

T: +86-551-64211984 F: +86-551-64211974
www.mingpinmetals.com