


UNIVERSAL COUPLING

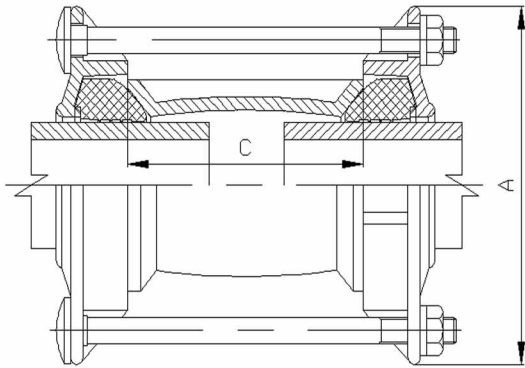

Materials of Parts

Sleeve	Ductile Iron to BS2789 Gr. 500/7
Flange	Ductile Iron to BS2789 Gr. 500/7
Gasket	EPDM to BS2494
Bolts	SS304 / Carbon Steel with Zinc
Nuts	SS304 / Carbon Steel with Zinc

Dimension: PN16

mm

Size	Pipe O.D.	A	C	Studs		Weight kg
				No.	Dia. x Length	
DN40	48 - 58	159	115	2	M12x220	3.4
DN50	59 - 73	172	115	2	M12x220	3.6
DN65	72 - 85	184	115	2	M12x220	3.8
DN80	88 - 103	202	115	4	M12x220	4.8
DN100	108 - 128	229	115	4	M12x220	5.8
DN125	125 - 140	240	115	4	M12x220	6.2
DN125	132 - 154	260	115	4	M12x220	7
DN150	159 - 182	288	115	4	M12x220	7.9
DN150	176 - 188	293	115	4	M12x220	9
DN175	184 - 198	303	115	4	M12x220	10
DN175	192 - 209	314	115	4	M12x220	10.5
DN200	218 - 235	339	115	4	M12x220	11.4
DN225	242 - 262	367	115	4	M12x220	12.5
DN250	265 - 280	385	115	6	M12x220	13.8
DN250	271 - 289	394	115	6	M12x220	14.8
DN250	284 - 297	402	115	6	M12x220	15.5
DN300	315 - 331	436	115	6	M12x220	16.3
DN300	322 - 340	445	115	6	M12x220	18.2

Note: The illustrations in this catalogue are subject to modifications without notice.